



WARRANTY
5 YEAR


IP65

-40~+40 °C

FLOOD LIGHT

TLT-FL11A

PHOTOMETRIC


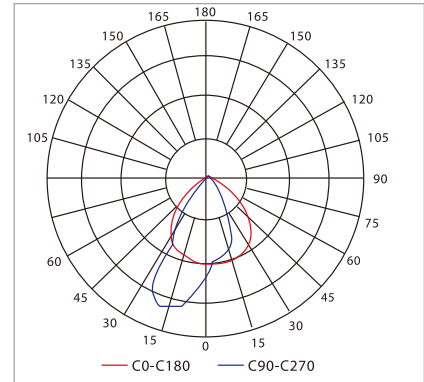


PRODUCT PARAMETERS

MODEL	VOLTAGE (V)	WATT(W)	4000K EFFICACY (LM/W)	4000K LUMENS (LM)	BEAM ANGLE (H-V)	REPLACE	DIMMING	ETL & CETL	DLC	CRI	POWER FACTOR	AVAILABLE CCT(K)
TLT-FL11A-20	120-277	17.61	113.39	1996.73	86°*76°	70-100W HID	N/A	✓	✓	>70	>0.92	4000
TLT-FL11A-30	120-277	28.99	113.8	3299.09	81°*77°	100-150W HID	N/A	✓	✓			5000

For the 5000K products, the EFFICACY and LUMENS will be about 3-5% higher

DIMENSION Inch(mm)



INSTALLATION



PACKAGE INFORMATION

MODEL	INNER BOX (MM)	MASTER CARTON (MM)	QTY/CTN	NET WEIGHT(KG)	GROSS WEIGHT(KG)	CUBIC METER
TLT-FL11A-20	230*230*150	480*340*260	4	6.8	7.6	0.043
TLT-FL11A-30	230*230*150	480*340*260	4	7.4	8.2	0.043

ACCESSORIES



10KV SPD



Photocell Voltage: 120-277V