



WARRANTY  
**5** YEAR


**IP65**

**-40~+40 C**

**FLOOD LIGHT**

**TLT-FL12A**

**PHOTOMETRIC**


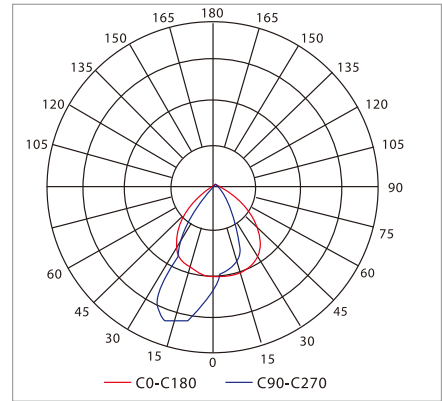


**PRODUCT PARAMETERS**

MODEL	VOLTAGE (V)	WATT(W)	4000K EFFICACY (LM/W)	4000K LUMENS (LM)	BEAM ANGLE (H-V)	REPLACE	DIMMING	ETL& CETL	DLC	CRI	POWER FACTOR	AVAILABLE CCT(K)
TLT-FL12A-50	120-277	45.01	116.45	5240.8	104°*64°	150-250W HID	N/A	✓	✓	>70	>0.92	4000 5000
TLT-FL12A-70	120-277	67.79	126.66	8609.11	104°*64°	175-320W HID	N/A	✓	✓			
TLT-FL12A-70	347-480	70	125	8750	104°*64°	175-320W HID	N/A	✓				

For the 5000K products, the EFFICACY and LUMENS will be about 3-5% higher

**DIMENSION Inch(mm)**




**INSTALLATION**



**PACKAGE INFORMATION**

MODEL	INNER BOX (MM)	MASTER CARTON (MM)	QTY/CTN	NET WEIGHT(KG)	GROSS WEIGHT(KG)	CUBIC METER
TLT-FL12A-50	270*280*190	560*320*420	4	13.6	14.8	0.76
TLT-FL12A-70	270*280*190	560*320*420	4	14.8	16	0.76

**ACCESSORIES**



10KV SPD



Photocell Voltage: 120-277V