



WARRANTY
5 YEAR


IP65

-40~+40 °C

FLOOD LIGHT

TLT-LED-FL31A

PHOTOMETRIC

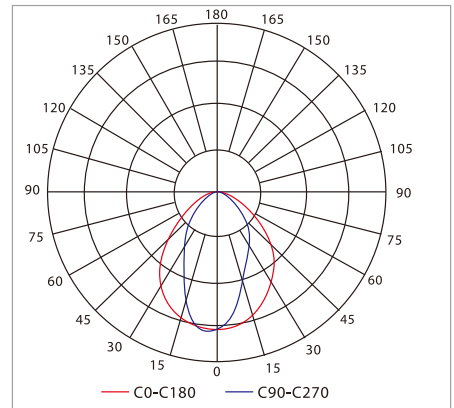


PRODUCT PARAMETERS

MODEL	VOLTAGE (V)	WATT(W)	4000K EFFICACY (LM/W)	4000K LUMENS (LM)	BEAM ANGLE (H-V)	REPLACE	DIMMING	ETL& CETL	DLC	CRI	POWER FACTOR	AVAILABLE CCT(K)
TLT-FL31A-20	120-277	20	110	2200	100°-60°	100-150W HID	N/A	✓	✓	>75	>0.92	4000 5000
TLT-FL31A-30	120-277	30.81	110.99	3419.47	100°-60°	100-150W HID	N/A	✓	✓			

For the 5000K products, the EFFICACY and LUMENS will be about 3-5% higher

DIMENSION Inch(mm)

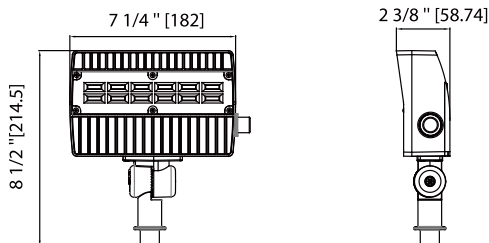


INSTALLATION



PACKAGE INFORMATION

MODEL	INNER BOX (MM)	MASTER CARTON (MM)	QTY/CTN	NET WEIGHT(KG)	GROSS WEIGHT(KG)	CUBIC METER
FL31A-20	220*220*67	475*390*245	10	10.8	12.3	0.046
FL31A-30	220*220*67	475*390*245	10	10.8	12.3	0.046

OPTIONAL ACCESSORIES



10KV SPD
120-277V



BUTTON STYLE
PHOTOCELL
120-277V