



WARRANTY
5 YEAR


IP65

-40~+40 C

FLOOD LIGHT

TLT-FL32A

PHOTOMETRIC

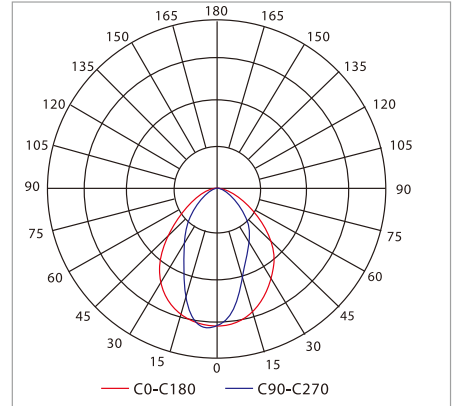


PRODUCT PARAMETERS

MODEL	VOLTAGE (V)	WATT(W)	4000K EFFICACY (LM/W)	4000K LUMENS (LM)	BEAM ANGLE (H-V)	REPLACE	DIMMING	ETL& CETL	DLC	CRI	POWER FACTOR	AVAILABLE CCT(K)
TLT-FL32A-40	347-480	40	110	4400	100°-60°	100-175W HID	N/A	✓		>75	>0.92	4000 5000
TLT-FL32A-50	120-277	52.1	110.03	5732.31	100°-60°	100-175W HID	N/A	✓	✓			

For the 5000K products, the EFFICACY and LUMENS will be about 3-5% higher

DIMENSION Inch(mm)

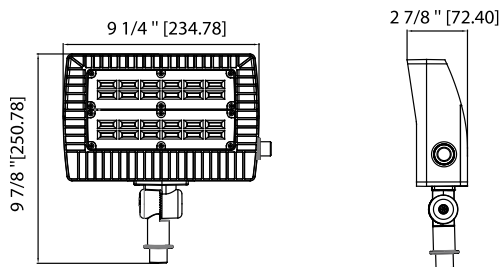


INSTALLATION



PACKAGE INFORMATION

MODEL	INNER BOX (MM)	MASTER CARTON (MM)	QTY/CTN	NET WEIGHT(KG)	GROSS WEIGHT(KG)	CUBIC METER
TLT-FL32A-40	260*260*80	550*450*286	10	20.6	22.1	0.071
TLT-FL32A-50	260*260*80	550*450*286	10	20.8	22.3	0.071

OPTIONAL ACCESSORIES



10KV SPD
120-277V



BUTTON STYLE
PHOTOCELL
120-277V