


FLOOD LIGHT



TLT-FL33A



PHOTOMETRIC

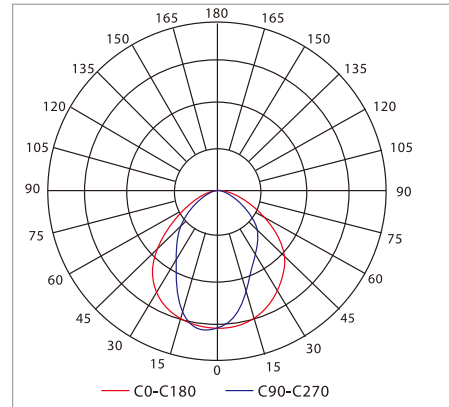


PRODUCT PARAMETERS


MODEL	VOLTAGE (V)	WATT(W)	4000K EFFICACY (LM/W)	4000K LUMENS (LM)	BEAM ANGLE (H-V)	REPLACE	DIMMING	ETL& CETL	DLC	CRI	POWER FACTOR	AVAILABLE CCT(K)
TLT-FL33A-75	120-277	75	120	9000	100°-60°	250-400W HID	Available	✓	✓	>75	>0.92	4000 5000
TLT-FL33A-75	347-480	75	120	9000	100°-60°	250-400W HID	Available	✓				
TLT-FL33A-100	120-277	100	120	12000	100°-60°	320-400W HID	Available	✓				
TLT-FL33A-100	347-480	100	120	12000	100°-60°	320-400W HID	Available	✓				

For the 5000K products, the EFFICACY and LUMENS will be about 3-5% higher

DIMENSION Inch(mm)

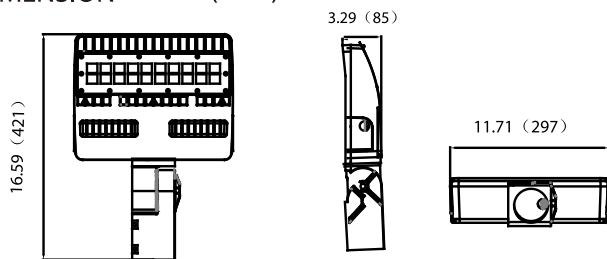

INSTALLATION

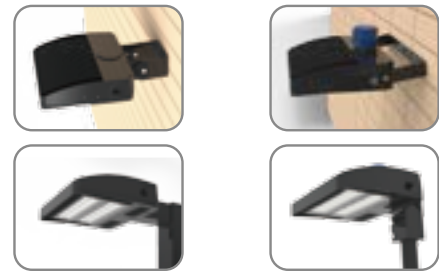

PACKAGE INFORMATION

MODEL	INNER BOX (MM)	MASTER CARTON (MM)	QTY/CTN	NET WEIGHT(KG)	GROSS WEIGHT(KG)	CUBIC METER
TLT-FL33A-75	425*85*320	460*210*350	2	11.8	13.8	0.034
TLT-FL33A-100	425*85*320	460*210*350	2	12.2	14.2	0.034

OPTIONAL ACCESSORIES

