


POST TOP LIGHT

TLT-RL21A

PHOTOMETRIC

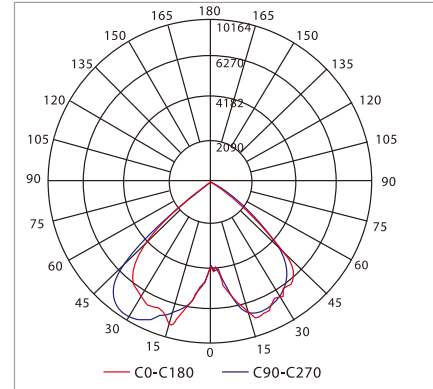


PRODUCT PARAMETERS

MODEL	VOLTAGE (V)	WATT(W)	4000K EFFICACY (LM/W)	4000K LUMENS (LM)	BEAM ANGLE (H-V)	REPLACE	DIMMING	ETL & CETL	DLC	CRI	POWER FACTOR	AVAILABLE CCT(K)
TLT-RL21A-60	120-277	64.42	105.03	6765.76	105°*105°	150-175W HID	N/A	✓	✓	>75	>0.92	4000 5000
TLT-RL21A-80	120-277	80.08	110.1	8816.53	105°*105°	175-320W HID	N/A	✓	✓			
TLT-RL21A-80	347-480	80	110.1	8816.53	105°*105°	175-320W HID	N/A	✓				
TLT-RL21A-120	120-277	120	108	12960	105°*105°	250-400W HID	N/A	✓				
TLT-RL21A-150	120-277	150	105	15750	105°*105°	400-600W HID	N/A	✓				
TLT-RL21A-150	347-480	150	105	15750	105°*105°	400-600W HID	N/A	✓				

For the 5000K products, the EFFICACY and LUMENS will be about 3-5% higher

DIMENSION Inch(mm)



INSTALLATION



PACKAGE INFORMATION

MODEL	INNER BOX (MM)	MASTER CARTON (MM)	QTY/CTN	NET WEIGHT(KG)	GROSS WEIGHT(KG)	CUBIC METER
TLT-RL21A-60	N/A	500*500*190	1	5.8	7.1	0.05
TLT-RL21A-80	N/A	500*500*190	1	6.2	7.5	0.05
TLT-RL21A-120	N/A	500*500*190	1	6.5	7.8	0.05
TLT-RL21A-150	N/A	500*500*190	1	6.5	7.8	0.05

ACCESSORIES



10KV SPD
120-277V



BUTTON STYLE
PHOTOCELL
120-277V