
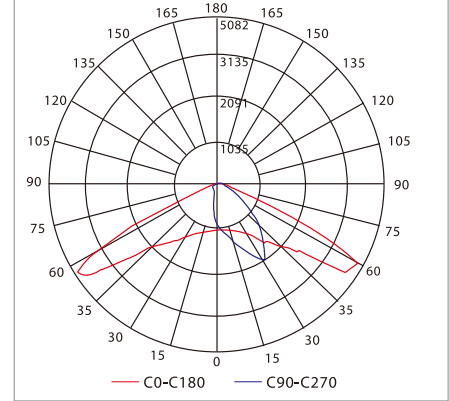


**STREET LIGHT**

**TLT-RL34A**


**PHOTOMETRIC**




**PRODUCT PARAMETERS**

MODEL	VOLTAGE (V)	WATT(W)	4000K EFFICACY (LM/W)	4000K LUMENS (LM)	BEAM ANGLE (H-V)	REPLACE	DIMMING	ETL& CETL	DLC	CRI	POWER FACTOR	AVAILABLE CCT(K)
TLT-RL34A-120	120-277	120	120	14400	Type II	250-400W HID	Available	✓		>75	>0.92	4000 5000
TLT-RL34A-150	120-277	150	110	16500	Type II	320-400W HID	Available	✓				
TLT-RL34A-150	347-480	150	110	16500	Type II	320-400W HID	Available					

For the 5000K products, the EFFICACY and LUMENS will be about 3-5% higher  
DIMENSION Inch(mm)

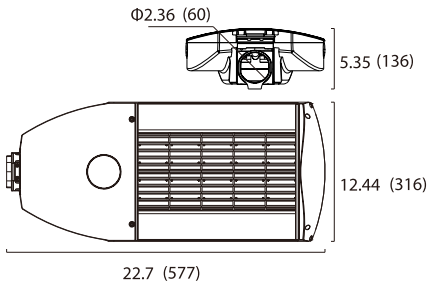

**INSTALLATION**



**PACKAGE INFORMATION**

MODEL	INNER BOX (MM)	MASTER CARTON (MM)	QTY/CTN	NET WEIGHT(KG)	GROSS WEIGHT(KG)	CUBIC METER
TLT-RL34A-120	N/A	640*380*215	1	7.1	8.4	0.053
TLT-RL34A-150	N/A	640*380*215	1	7.2	8.5	0.053

**ACCESSORIES**

