


WALL PACK LIGHT



TLT-WP01/02A



PHOTOMETRIC

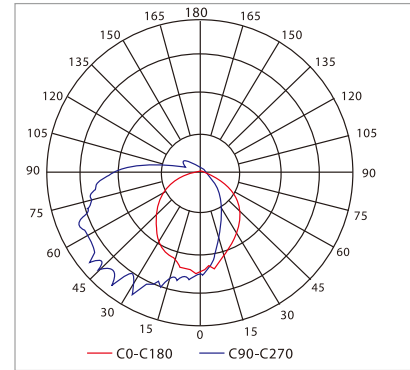


PRODUCT PARAMETERS

MODEL	VOLTAGE (V)	WATT(W)	4000K EFFICACY (LM/W)	4000K LUMENS (LM)	BEAM ANGLE (H-V)	REPLACE	DIMMING	ETL & CETL	DLC	CRI	POWER FACTOR	AVAILABLE CCT(K)
TLT-WP01A-40	120-277	43.12	107.63	4641.06	110°*105°	70-175W HID	Available	✓	✓	>75	>0.92	4000 5000
TLT-WP01A-40	347-480	40	107.63	4641.06	110°*105°	70-175W HID	Available	✓				
TLT-WP01A-60	120-277	61.6	105.73	6512.79	110°*100°	175-250W HID	Available	✓				
TLT-WP01A-60	347-480	60	105.73	6512.79	110°*100°	175-250W HID	Available	✓				
TLT-WP01A-80	120-277	76.83	106.06	8148.49	100°*110°	250-400W HID	Available	✓				
TLT-WP01A-80	347-480	80	106.06	8148.49	100°*110°	250-400W HID	Available	✓				
TLT-WP02A-120	120-277	118.7	114.71	13616.4	100°*110°	320-400W HID	Available	✓				
TLT-WP02A-120	347-480	120	110	13200	100°*110°	320-400W HID	Available	✓				

For the 5000K products, the EFFICACY and LUMENS will be about 3-5% higher

DIMENSION Inch(mm)

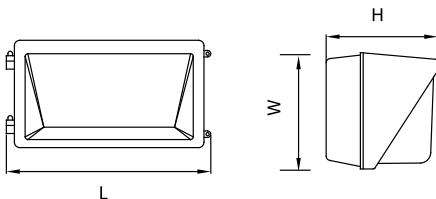

Model	WP01A	WP02A
L	14.2(360)	18.4(468)
W	9.1(232)	9.1(232)
H	7.68(195)	9.4(240)

INSTALLATION



PACKAGE INFORMATION

MODEL	INNER BOX (MM)	MASTER CARTON (MM)	QTY/CTN	NET WEIGHT(KG)	GROSS WEIGHT(KG)	CUBIC METER
TLT-WP01A-40	N/A	390*270*240	1	3.5	4	0.026
TLT-WP01A-60	N/A	390*270*240	1	3.9	4.4	0.026
TLT-WP01A-80	N/A	390*270*240	1	4	4.5	0.026
TLT-WP02A-120	N/A	490*280*290	1	6.1	7.1	0.04

OPTIONAL ACCESSORIES



10KV SPD
120-277V



BUTTON STYLE
PHOTOCELL
120-277V