


**WALL PACK LIGHT**

**TLT-WP04A**

**PHOTOMETRIC**

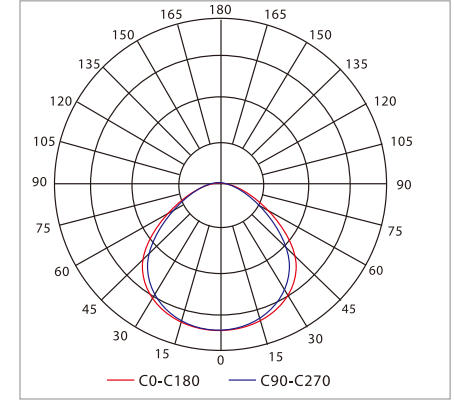


**PRODUCT PARAMETERS**

MODEL	VOLTAGE (V)	WATT(W)	4000K EFFICACY (LM/W)	4000K LUMENS (LM)	BEAM ANGLE (H-V)	REPLACE	DIMMING	ETL & CETL	DLC	CRI	POWER FACTOR	AVAILABLE CCT(K)
TLT-WP04A-40	120-277	42.97	114.26	4909.65	115°*110°	70-175W HID	Available	✓	✓	>75	>0.92	4000 5000
TLT-WP04A-40	347-480	40	114.26	4909.65	115°*110°	70-175W HID	Available	✓				
TLT-WP04A-60	120-277	63.18	109.28	6904.46	115°*110°	175-250W HID	Available	✓	✓			
TLT-WP04A-60	347-480	60	109.28	6904.46	115°*110°	175-250W HID	Available	✓				
TLT-WP04A-80	120-277	80.37	107.47	8637.75	115°*110°	250-400W HID	Available	✓	✓			
TLT-WP04A-80	347-480	80	107.47	8637.75	115°*110°	250-400W HID	Available	✓				

For the 5000K products, the EFFICACY and LUMENS will be about 3-5% higher

**DIMENSION Inch(mm)**

**INSTALLATION**

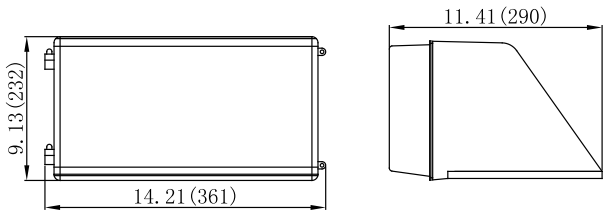

**PACKAGE INFORMATION**

MODEL	INNER BOX (MM)	MASTER CARTON (MM)	QTY/CTN	NET WEIGHT(KG)	GROSS WEIGHT(KG)	CUBIC METER
TLT-WP04A-40	N/A	420*290*350	1	4	4.5	0.43
TLT-WP04A-60	N/A	420*290*350	1	4.4	4.9	0.43
TLT-WP04A-80	N/A	420*290*350	1	4.5	5	0.43

**OPTIONAL ACCESSORIES**



10KV SPD  
120-277V



BUTTON STYLE  
PHOTOCELL  
120-277V