


WALL PACK LIGHT

TLT-WP07A

PHOTOMETRIC


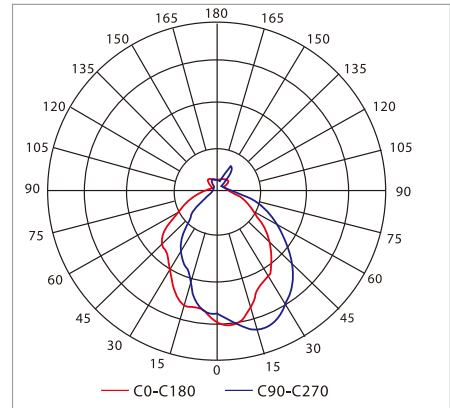


PRODUCT PARAMETERS

MODEL	VOLTAGE (V)	WATT(W)	4000K EFFICACY (LM/W)	4000K LUMENS (LM)	BEAM ANGLE (H-V)	REPLACE	DIMMING	ETL & CETL	DLC	CRI	POWER FACTOR	AVAILABLE CCT(K)
TLT-0WP07A-30	120-277	30	120	3600	100°*80°	70-100W HID	N/A	✓				
TLT-WP07A-40	347-480	40	120	4800	100°*80°	70-150W HID	N/A	✓		>75	>0.92	4000 5000
TLT-WP07A-50	120-277	50	120	6000	100°*80°	150-250W HID	Available	✓				

For the 5000K products, the EFFICACY and LUMENS will be about 3-5% higher

DIMENSION Inch(mm)



INSTALLATION



PACKAGE INFORMATION

MODEL	INNER BOX (MM)	MASTER CARTON (MM)	QTY/CTN	NET WEIGHT(KG)	GROSS WEIGHT(KG)	CUBIC METER
TLT-WP07A-30	220*178*100	460*376*225	8	13.6	15.4	0.04
TLT-WP07A-40	220*178*100	460*376*225	8	14.6	16.4	0.04
TLT-WP07A-50	220*178*100	460*376*225	8	14.6	16.4	0.04


OPTIONAL ACCESSORIES



10KV SPD
120-277V



BUTTON STYLE
PHOTOCELL
120-277V



DIMMABLE MOTION
SENSOR
120-277V