


WALL PACK LIGHT

TLT-WP07B

PHOTOMETRIC

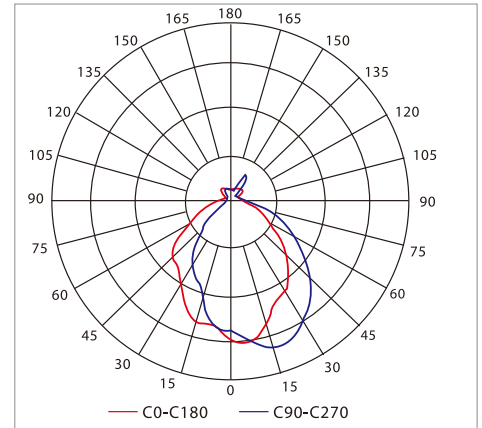


PRODUCT PARAMETERS

MODEL	VOLTAGE (V)	WATT(W)	4000K EFFICACY (LM/W)	4000K LUMENS (LM)	BEAM ANGLE (H-V)	REPLACE	DIMMING	ETL& CETL	DLC	CRI	POWER FACTOR	AVAILABLE CCT(K)
TLT-WP07B-75	120-277	75	115	8625	100°*80°	250-320W HID	Available	✓		>75	>0.92	4000 5000
TLT-WP07B-75	347-480	75	115	8625	100°*80°	250-400W HID	Available	✓				

For the 5000K products, the EFFICACY and LUMENS will be about 3-5% higher

DIMENSION Inch(mm)

INSTALLATION

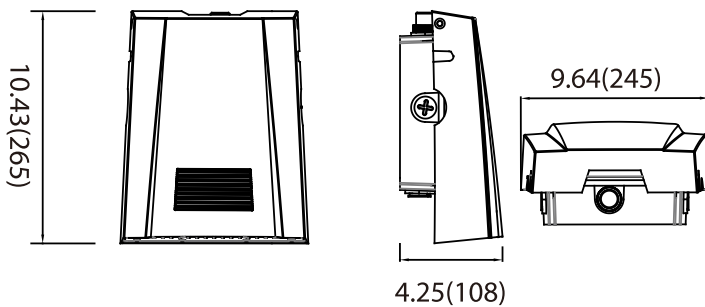

PACKAGE INFORMATION

MODEL	INNER BOX (MM)	MASTER CARTON (MM)	QTY/CTN	NET WEIGHT(KG)	GROSS WEIGHT(KG)	CUBIC METER
TLT-WP07B-75	283*260*118	295*540*246	4	12.4	14.6	0.04

OPTIONAL ACCESSORIES

