



WARRANTY
5 YEAR


IP65

-40~+40 °C

WALL PACK LIGHT

TLT-WP11A

PHOTOMETRIC

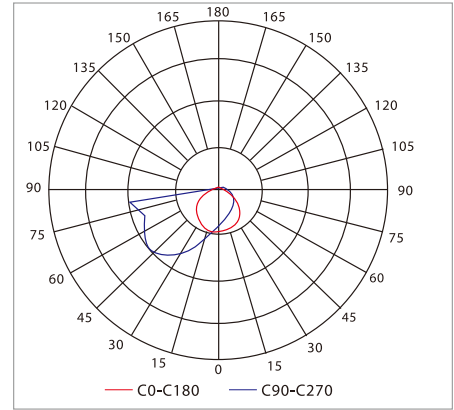


PRODUCT PARAMETERS

MODEL	VOLTAGE (V)	WATT(W)	4000K EFFICACY (LM/W)	4000K LUMENS (LM)	BEAM ANGLE (H-V)	REPLACE	DIMMING	ETL & CETL	DLC	CRI	POWER FACTOR	AVAILABLE CCT(K)
TLT-WP11A-12	120-277	13.02	99.98	1301.39	115°*100°	30-50W HID	N/A	✓	✓	>75	>0.92	4000 5000
TLT-WP11A-20	120-277	18.4	107.69	1985.95	115°*100°	50-70W HID	N/A	✓	✓			
TLT-WP11A-28	120-277	28	102	2850	115°*100°	70-100W HID	N/A	✓				

For the 5000K products, the EFFICACY and LUMENS will be about 3-5% higher

DIMENSION Inch(mm)

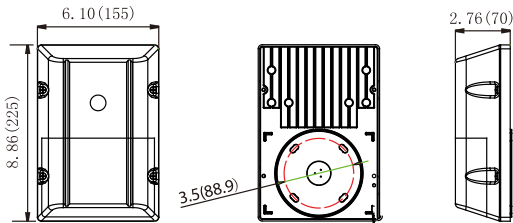

INSTALLATION



PACKAGE INFORMATION

MODEL	INNER BOX (MM)	MASTER CARTON (MM)	QTY/CTN	NET WEIGHT(KG)	GROSS WEIGHT(KG)	CUBIC METER
TLT-WP11A-12	240*170*100	480*250*190	5	4.3	5.3	0.023
TLT-WP11A-20	240*170*100	480*250*190	5	4.5	5.5	0.023
TLT-WP11A-28	240*170*100	480*250*190	5	4.5	5.5	0.023

OPTIONAL ACCESSORIES



BUTTON STYLE
PHOTOCELL
120-277V