


**HIGH BAY LIGHT**

**TLT-HB21-24A**

**PHOTOMETRIC**

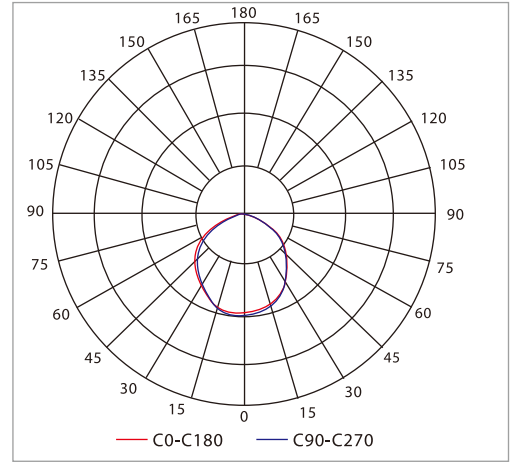


**PRODUCT PARAMETERS**

MODEL	VOLTAGE (V)	WATT(W)	4000K EFFICACY (LM/W)	4000K LUMENS (LM)	BEAM ANGLE (H-V)	REPLACE	DIMMING	ETL& CETL	DLC	CRI	POWER FACTOR	AVAILABLE CCT(K)
TLT-HB21A-110	120-277V	110	136	14300	120°-120°	250-400W HID	Available	✓	✓	>75	>0.92	4000 5000
TLT-HB22A-160	120-277V	160	134	20800	120°-120°	320-600W HID	Available	✓	✓			
TLT-HB23A-220	120-277V	220	132	28600	120°-120°	400-750W HID	Available	✓	✓			
TLT-HB24A-320	120-277V	320	132	41600	120°-120°	1000-1500W HID	Available	✓	✓			

For the 5000K products, the EFFICACY and LUMENS will be about 3-5% higher

**DIMENSION** Inch(mm)

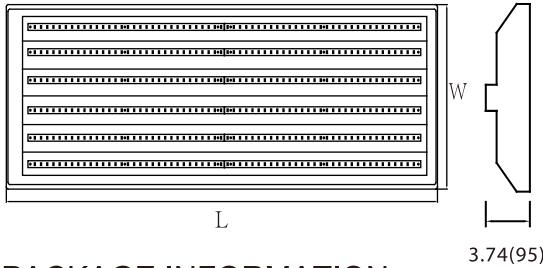

Model	L	W
HB21A	24.40(620)	12.59(320)
HB22A	24.40(620)	17.32(440)
HB23A	47.24(1200)	12.59(320)
HB24A	47.24(1200)	17.32(440)

**INSTALLATION**



**PACKAGE INFORMATION**

MODEL	INNER BOX (MM)	MASTER CARTON (MM)	QTY/CTN	NET WEIGHT(KG)	GROSS WEIGHT(KG)	CUBIC METER
TLT-HB21A-110	N/A	680*360*110	1	5.1	6.50	0.027
TLT-HB22A-160	N/A	680*480*110	1	6.7	8.50	0.036
TLT-HB23A-220	N/A	1260*360*110	1	9.1	11.50	0.051
TLT-HB24A-320	N/A	1260*480*110	1	10.2	13.20	0.067

**ACCESSORIES**



ON-OFF OR DIMMABLE  
Motion Sensor  
120-277V



WIRE GUARD